


LVT Low Voltage Thermostat Wire CMG FT4

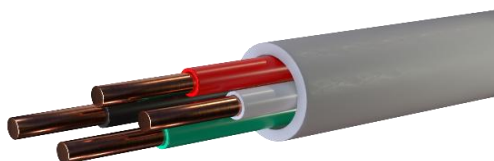

Solid bare copper conductors, PVC insulation, Brown or White PVC jacket FT-4, -30° C to 105° C, 30 Volt CSA Approved

Specification and Compliance: CSA C22.2 No. 35

Flame test compliances: CMG FT4

RW Item #	Conductor			Wall Thickness		Nominal O.D. (inches)	Total (lbs/km)
	No.	AWG Weight Size	Stranding	Insulation (inches)	Jacket (inches)		
LVT18-02*	2	18	Solid	.015	.030	.135 X .208	73
LVT18-03	3	18	Solid	.015	.030	.223	108
LVT18-04	4	18	Solid	.015	.030	.243	133
LVT18-05	5	18	Solid	.015	.030	.264	167
LVT18-06	6	18	Solid	.015	.030	.286	190
LVT18-08	8	18	Solid	.015	.030	.309	267
LVT18-10	10	18	Solid	.015	.030	.320	327
LVT18-12	12	18	Solid	.015	.030	.365	360

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.

Colour Coding Chart

Conductor		Conductor		Conductor	
Number	Colour	Number	Colour	Number	Colour
1	Black	5	Orange	9	Purple
2	White	6	Blue	10	Grey
3	Red	7	Yellow	11	Pink
4	Green	8	Brown	12	Tan

Features

- CMG FT4 Flame rated multi-purpose low voltage cable.

Application

- Low voltage heating & air conditioning controls
- Thermostat, doorbell signal cable
- Intercom systems
- Security systems