


SPT-1 Parallel Lamp Cord 300 Volt CSA/UL FT1

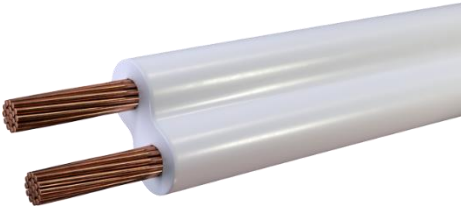

Stranded bare copper, rip type PVC insulation, parallel construction. -20° C to 105° C, 300 Volts

Specifications and Compliance

Industry compliances: CSA Spec. C22.2, No. 49; CSA LL224650, UL Spec. No. 62; UL E46194

Flame test compliances: CSA FT1 Flame Test

RW Item #	Conductor			Wall Thickness (inches)	Nominal O.D. (inches)	Total Weight (lbs/km)
	No.	AWG Size	Stranding			
SPT20-02	2	20	26 X 30	.031	.101 X .188	59
SPT18-02	2	18	41 X 34	.031	.110 X .205	69

- Also available in SPT-2
- Also available in SPT-3

Colours available:

- Black
- White
- Brown
- Clear
- Clear Gold
- Gold
- Clear Gold Green
- Silver Green

Features

- Raised rib on one conductor or ease of identification
- Versatile, light weight
- Flexible

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.



VANCOUVER | VICTORIA | EDMONTON | CALGARY | WINNIPEG | TORONTO | HAMILTON | MONTREAL | HALIFAX