


Type SVT 300 Volts CSA UL

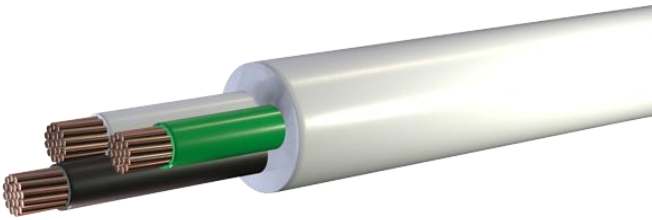

Fully annealed, stranded bare copper per ASTM B-174, colour-coded polyvinyl chloride PVC insulation, polyvinyl chloride PVC Jacket. -20° C to 105° C, 300 Volts.

Specifications and Compliance

Industry compliances: CSA C22. 2 No. 49 UL No. 62

Flame test compliances: CSA FT2, VW-1 Flame Tests

RW Item #	Conductor			AMPS*	Wall Thickness		Nominal O.D. (inches)	Total Weight (lbs/km)
	No.	AWG Size	Stranding		Insulation (inches)	Jacket (inches)		
SVT18-02	2	18	41 x 34	10	.030	.040	.235	121
SVT18-03	3	18	41 x 34	10	.030	.040	.245	128

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.

Conductor Colours Code:

- Black
- White
- Green

Outer jacket Colours:

- Black
- White
- Grey

Application

- Vacuum cord SVT is used in small, light-duty tools and appliances.
- Vacuum cleaners.
- Food processing tools
- Other light applications in different types of home and office equipment
- In light applications as a temporary light-duty extension cord.

