


Cat5e 24-4pr UTP CMR-FT4

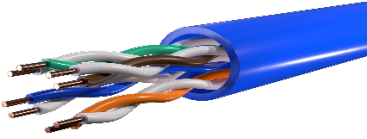

Cat5E UTP CMR FT4. 24awg solid copper 4pair unshielded, twisted pairs thermoplastic insulated, coloured PVC jacket. The cable meets all the ANSI/TIA.EIA-568-B.2 specifications

Specifications and Compliance

- CSA C22.2 No. 214-08
- NFPA262, ANSI/TIA-568-C.2
- ANSI/ICEA S-90-661-2021 Article 800,
- NEC (NFPA 70) Industry compliances
- UL 444

| RW Item No. | No. of Pairs | Solid Cu AWG | Nominal Diameter (mm) | Nominal Impedance (ohms) | Nominal Velocity of Prop. (%) | Approx Weight (kg/km) |
|----------------------|--------------|--------------|-----------------------|--------------------------|-------------------------------|-----------------------|
| EDD24-04B0-03 | 4 | 24 | 5.6 | 100 (+/- 15) | 71 | 43 |

Colour Coding

- Blue & white/blue stripe
- Orange & white/orange stripe
- Green & white/green stripe
- Brown & white/brown stripe

Features

- High Performance of transmission exceeding Category 5e specifications
Sweep Frequency up to 350 MHz
- Rip cord to ease jacket stripping
- Reel Box for ease of installation

Application

- 10BASE-T through 1000BASE-T Ethernet
- Power over Ethernet (PoE)
- IEEE 802.3af PoE+
- IEEE 802.3at Type 1 and 2 ATM and token ring
- LAN Network Cable

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.