


Unshielded Multi-Conductor CMP FT6

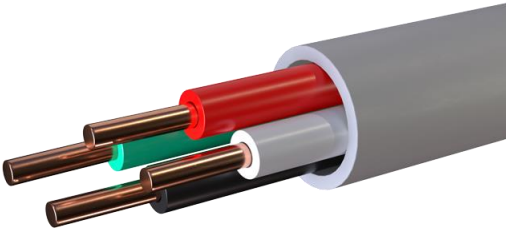

Solid Bare Copper Conductors PVC Insulation, Grey PVC Jacket FT-6, -20°C to 75°C 300/600 Volts, CSA CMP Approved.

Specifications and Compliance

CSA C22.2 No. 210, Appliance Wiring Material (Type AWM I/II A/B 300V or 600V) CSA C22.2 No. 214, Communication Cables (Type CMP 300V) UL 444, Communication Cables (Type CMP 300V)

Flame test compliances: FT6 – CMP; NFPA 262, Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces

22, 20, & 18 awg

RW Item #	Conductor			Wall Thickness		Nominal O.D. (inches)	Total Weight (lbs/km)
	No.	AWG Size	Stranding	Insulation (inches)	Jacket (inches)		
**PLA22-04CBO	4	22	Solid	.008	.016	.127	46
PLA20-02CBO	2	20	Solid	.008	.016	.139	48
PLA18-02CBO	2	18	Solid	.008	.016	.143	53
PLA18-03CBO	3	18	Solid	.008	.016	.151	74
PLA18-04CBO	4	18	Solid	.008	.016	.165	96
PLA18-05CBO	5	18	Solid	.008	.016	.174	117
PLA18-06CBO	6	18	Solid	.008	.016	.210	139
PLA18-08CBO	8	18	Solid	.008	.016	.212	186
PLA18-10CBO	10	18	Solid	.008	.016	.235	212

****PLA22-04CBO (Station Z) Colour Code: 1) Red 2) Green 3) Yellow 4) Black.**

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.

Unshielded Multi-Conductor CMP FT6

Application

- Intercom, security
- Alarm systems
- Heating, air conditioning
- Thermostat controls.
- Low voltage application in plenum rated spaces

Features

- For use in Class 2 (CEC Part I) circuits in exposed or concealed wiring or use in raceways
- In dry or damp locations where not subject to mechanical damage.
- For use in communication circuits when exposed, concealed, or used in raceways; indoors in dry or damp locations; or in ceiling air-handling plenums.

Colour Coding

Conductor		Conductor		Conductor	
Number	Colour	Number	Colour	Number	Colour
1	Black	5	Orange	9	Purple
2	White	6	Blue	10	Grey
3	Red	7	Yellow	11	Pink
4	Green	8	Brown	12	Tan

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.