

12 Fiber M/M TB 62.5/125 AIA Black PVC Jacket




Flexible, heavy duty interlocking aluminum tape helically applied over the inner jacketed **12 fiber**, tight buffer, 62.5/125 Multi mode fiber cable core, with a chemical resistant S/R Black PVC jacket.

Specifications and Compliance

Industry compliances: CSA C22.2 No. 232, UL 1569, UL 1651, UL 1666, NFPA 262, Telcordia GR-409-CORE, Issue 2, ANSI/ICEA S-104-696, ANSI/TIA-568.3-D

Flame test compliances: CSA FT4 OFCR

RW Item #	Fiber Count	Nominal Diameter (inches)	Nominal Weight (kg/Km)	Maximum Tensile Loading		Maximum Bending Radius		
				Max. Compression lbf/inch	Install lbs	Long Term lbs	Install Inches	Long Term Inches
FO-F108-012U30-E991	12	0.61	167	286	300	90	24.6	12.3

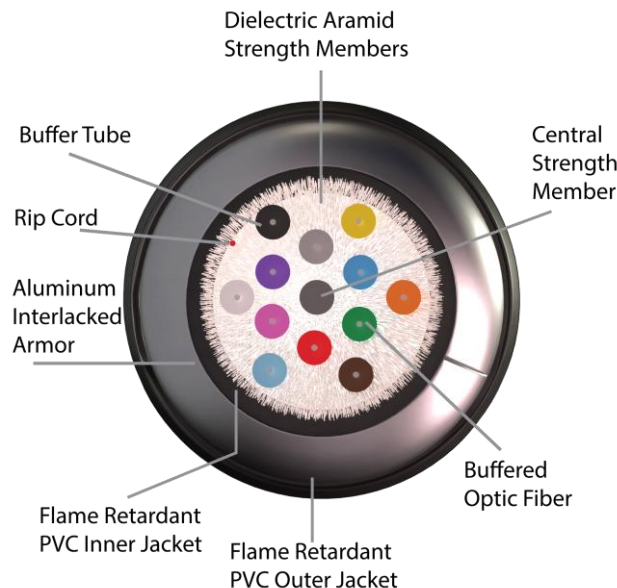

12 Fiber M/M TB 62.5/125 AIA Black PVC Jacket

Colour Coding

Fiber #	Colour	Fiber #	Colour
1	Blue	7	Red
2	Orange	8	Black
3	Green	9	Yellow
4	Brown	10	Violet
5	Grey	11	Rose
6	White	12	Aqua

Features

- Excellent crush and impact resistance
- Provides long service life
- Cost effective alternative to installations in conduit

Application

- Industrial S/M fiber optic applications
- intrabuilding backbones
- Conduit pathway
- Direct burial
- Service entrance to communication closets
- For use in cable tray