


Cat5e 24-4pr UTP CMX Outdoor Rated

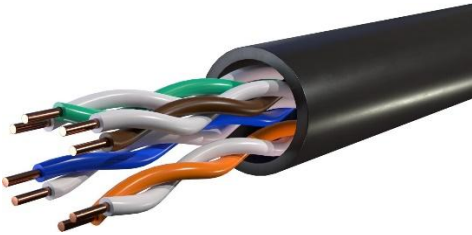

Cat5E UTP CMX Outdoor - 24awg solid copper 4pair unshielded, twisted pairs, PE insulated, Gel Filled Core Black PE Jacket. The cable meets all of the ANSI/TIA.EIA-568-B.2 specifications

Specifications and Compliance:

CSA C22.2 No. 214-08, NFPA 262 ANSI/TIA-568-C.2, ANSI/ICEA S-90-661-2021 Article 800, NEC (NFPA 70)

RW Item No.	No. of Pairs	Solid Cu AWG	Nominal Diameter (mm)	Nominal Impedance (ohms)	Nominal Velocity of Prop. (%)	Approx Weight (kg/km)
TEE24-04P-CAT5E-305	4	24	5.6	100 (+/- 15)	71	45

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.

Colour Coding

- Blue & white/blue stripe
- Orange & white/orange stripe
- Green & white/green stripe
- Brown & white/brown stripe

Features

- High Performance of transmission exceeding Category 5e specifications
- Gel filled core water blocking
- Rip cord to ease jacket stripping
- Black S/R-Sun Resistant LLDPE Jacket

Application

- 10BASE-T through 1000BASE-T Ethernet
- Power over Ethernet (PoE)
- IEEE 802.3af PoE+
- IEEE 802.3at Type 1 and 2 ATM and token ring
- Outdoor LAN Network Cable