


Shielded Multi-Pair CMG FT4 600V CSA

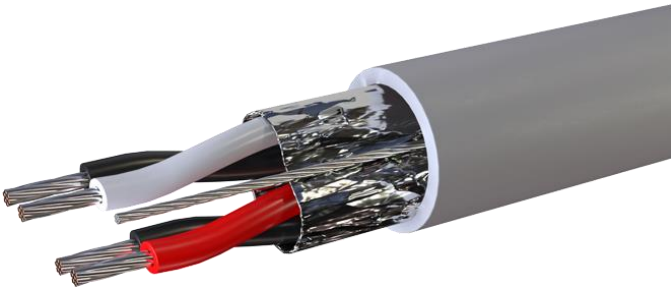

Stranded Tinned Copper Conductors SR-PVC Insulation, 100% Aluminum Foil Shield, Stranded Tinned Copper Drain Wire, Grey PVC Jacket FT-4, -20° C to 105° C, 600 Volts

Specifications and Compliance

CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444 Certified to CSA C22.2 No. 210.2 - Type AWM.

Flame test compliances: FT4 - CMG

18 & 16 AWG

RW Item #	Pair			Drain AWG Size	Wall Thickness		Nominal O.D. (inches)	Total (lbs/km)
	No.	AWG Size	Stranding		Insulation (inches)	Jacket (inches)		
E18-02PA1	2	18	16 x 30	20	.012	.023	.290	167
E18-03PA1	3	18	16 x 30	20	.012	.030	.323	227
E18-04PA1	4	18	16 x 30	20	.012	.030	.356	280
E18-05PA1	5	18	16 x 30	20	.012	.030	.389	314
E18-06PA1	6	18	16 x 30	20	.012	.030	.406	387
E18-09PA1	9	18	16 x 30	20	.012	.035	.482	540
E18-12PA1	12	18	16 x 30	20	.012	.035	.570	689
E18-15PA1	15	18	16 x 30	20	.012	.050	.620	927
E18-19PA1	19	18	16 x 30	20	.012	.050	.772	1,099
E18-25PA1	25	18	16 x 30	20	.012	.080	.785	1,433
E16-02PA1	2	16	26 x 30	18	.015	.030	.366	247
E16-03PA1	3	16	26 x 30	18	.015	.030	.390	327
E16-04PA1	4	16	26 x 30	18	.015	.030	.434	420
E16-06PA1	6	16	26 x 30	18	.015	.035	.495	573
E16-09PA1	9	16	26 x 30	18	.015	.050	.631	900
E16-12PA1	12	16	26 x 30	18	.015	.050	.694	1,140
E16-15PA1	15	16	26 x 30	18	.015	.050	.754	1,393

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.

Shielded Multi-Pair CMG FT4 600V CSA

Application

- Data transmission
- Recording studios
- Broadcast sound systems
- Electronic & control circuits
- Signal applications in computers and industrial equipment.

Features

- Grey FT4 CMG Rated jacket
- Dual rated CSA/UL
- Versatile application cable
- Rohs Compliant

Colour Coding

Pair			Pair				Pair				
Number	Colour		Number	Colour		Number	Colour		Number	Colour	
1	Black	paired with	Red	14	Green	paired with	White	27	Brown	paired with	Orange
2	Black	paired with	White	15	Green	paired with	Blue	28	Orange	paired with	Yellow
3	Black	paired with	Green	16	Green	paired with	Yellow	29	Purple	paired with	Orange
4	Black	paired with	Blue	17	Green	paired with	Brown	30	Purple	paired with	Red
5	Black	paired with	Yellow	18	Green	paired with	Orange	31	Purple	paired with	White
6	Black	paired with	Brown	19	White	paired with	Blue	32	Purple	paired with	Dk Green
7	Black	paired with	Orange	20	White	paired with	Yellow	33	Purple	paired with	Lt. Blue
8	Red	paired with	White	21	White	paired with	Brown	34	Purple	paired with	Yellow
9	Red	paired with	Green	22	White	paired with	Orange	35	Purple	paired with	Brown
10	Red	paired with	Blue	23	Blue	paired with	Yellow	36	Purple	paired with	Black
11	Red	paired with	Yellow	24	Blue	paired with	Brown	37	Grey	paired with	White
12	Red	paired with	Brown	25	Blue	paired with	Orange				
13	Red	paired with	Orange	26	Brown	paired with	Yellow				

All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without notice.